

Guwahati Biotech Park

Technology Incubation Centre, Amingaon

Guwahati- 781 031

GBP/3.3.64/2024-25/17

DATE: 23 - 08 - 2024

NOTICE FOR INVITING QUOTATION

Sealed quotations are invited from the registered firms/authorized dealers/ intending supplier/manufacturers for supply and commissioning of setting up of Biofloc unit under Business Incubation Centre for Fisheries and Aquaculture (BICFA) at Guwahati Biotech Park (GBP), Amingaon as per specification given in **Annexure I (Pg. No. 4-5)**. The bidder can submit quotation of setup mentioned below. BICFA, GBP can appoint individual/separate bidder for the afore setup as per the need and requirement of BICFA project. GBP reserves the right to accept or reject any or all of the offers without assigning any reasons whatsoever. Details may be collected from the BICFA, GBP office or may be downloaded from the official website www.guwahatibiotechpark.com under Business/Tender section. Last date for submission of quotation is ~~21st~~ ^{29th} August, 2024 at 12.00pm.

<i>Sl. No.</i>	<i>Items</i>	<i>Specification</i>
1.	Biofloc setup (4 concrete tanks) _Shed Materials, Biofloc tanks and water supply	Annexure I


Sd/-
Chief Executive Officer
Guwahati Biotech Park

TERMS AND CONDITIONS

1. Quotations will have to be submitted in a Sealed Envelope and should reach the office of the Business Incubation Centre for Fisheries and Aquaculture (BICFA), Guwahati Biotech Park, Amingaon, Guwahati-781031 on or before ~~29th~~ August, 2024 at 12 pm and will be opened on the same day at 2 pm.
2. Late or delayed quotation will not be accepted.
3. Rates quoted should be on Door Delivery at Business Incubation Centre for Fisheries and Aquaculture (BICFA), Guwahati Biotech Park, Amingaon, Guwahati-781031 Basis as per the format in **Annexure III**.
4. No representation for the enhancement of the prices of the accepted tender or alteration of the terms and conditions will be entertained at any stage.
5. Quoted rates must be valid for 45 days from the date of submission of the quotation.
6. Quotation to be submitted in the prescribed format (**Annexure III**) along with bidder's information (**Annexure II**).
 - a. Warranty: The bidder should carry an on-site comprehensive warranty/guarantee of the item for a period of minimum 12 months. It shall be the duty of the contractual firm to replace/repair any of the non-functional parts during the Warranty/Guarantee period. The Tenderer shall invariably state the period of Guarantee/Warranty of the item offered.
 - b. Payment Terms: 95% payment shall be made within 30 days from the date of successful delivery and installation of the items. The remaining 5% of the total value of the work will be retained as Performance Security and that will be released after completion of warranty period.
7. Quotation not confirming to the set procedure as above will be rejected. Conditional, telegraphic quotation shall be rejected out rightly.
8. BICFA, GBP shall not be held responsible for any postal delay in sending or late receipt of quotation.
9. Upto date Pan Card, Trade license, GST registration certificate and other relevant documents to be submitted.
10. Price of quotes meeting the technical specification will only be considered for evaluation (Item wise Price Evaluation).
11. BICFA, GBP, reserves the rights of acceptance or rejection of any or all quotations.
12. The selected Tenderer shall initiate the work within 7 days of receipt of work order from Guwahati Biotech Park.
13. List of reputed organizations/institutions where similar orders have been executed with the total amount of the project cost taken in last three years (copies of work order to be enclosed)

14. Price of optional accessories as required by NIQ specifications and also may be relevant for the offered equipment will have to be specifically mentioned in the quotation.
15. Bidder should submit the price after studying the entire NIQ document and visiting the sites for satisfying himself on the conditions.
16. Bidder will have to submit an acceptance letter within 2 (two) days stating the assurance of completing the work within the given period after getting the work order.
17. Bidder will have to complete the work within 30 days from the date of issue of purchase order.
18. Construction of the unit should follow the scope of work as per **Annexure I** and layout as per **Annexure IV** given in the NIQ.
19. All the materials to be used in this work should be of PWD approved brands.

Sd/-
Chief Executive Officer
Guwahati Biotech Park

Scope of the Work (Materials to be used in this work should be of PWD approved brand)

- 1. Leveling (around 1292 ft²)**
 - De-weeding
 - Sand leveling
- 2. Flooring(around 861 ft² including the floor of the unit i.e. 1292 ft²)**
 - Earth filling approx. 861 ft²
 - RCC foundation and beam at plinth level
 - Brick soling and concrete flooring
- 3. Wall& Post (Half wall)**
 - Wall height of 3-4ft from floor
 - Brick work for wall 5-inch thickness of brick work
 - Plaster on both side of brick work
 - Floor height 2ft from the ground
 - Concrete post 8-inch X 8-inch and 10ft height (from floor)
 - Total number of posts: 10nos. (4 concrete + 6 MS iron pole of 3-inch)
 - Concrete work with MS iron pole
- 4. Beam**
 - Concrete beam 8-inch X 8-inch (approx.) at Plinth and Roof Level (6-inch X 6-inch)
- 5. Roofing**
 - MS Tubular Truss (2-inch) as per design
 - Transparent sheet (2nos.) one side and remaining are colored sheet
- 6. Grill & fitting (available at GBP)**
 - Grill will be placed on the half wall extending up to the roof beam
 - Grill fitting with concrete post and wall with welding
- 7. GI net**
 - GI net and fittings for triangular area between beam and roof on both the sides
- 8. Doors**
 - Two grided fabrication door or aluminum door with lock system will be placed on two sides of the unit of (3 ft)
 - Bottom side covered with plain sheet to avoid animal entry
- 9. Concrete tanks**
 - 4 nos. circular RCC tank will be required
 - Thickness of the tank wall (5-inch)
 - Diameter will be of 8 ft
 - Height will be of 4 ft
 - Slope at the bottom of each tank
 - Pipe connections will be installed at the bottom of each tank for proper drainage

- Inner layer of Dr. Fixit Pidifin 2K for tanks to avoid leakage for water proofing (food grade)

10. Collecting chamber (2.25 ft²)

- Drainage pipes from each tank will lead to a central collecting chamber, from where wastes will be drained out and the central chamber will also maintain the water level in each tank

11. Water supply and connections

- Inlet connections in each tank to fill water [PVC/ PPR pipe (1-1.5-inch diameter) &160 ft (approx.) in length]
- Outlet connections in each tank for waste removal [PVC pipe (4-inch diameter) &100 ft (approx.) in length]
- PVC/PPR pipes (3 – 4-inch), L&T joints, valves, adhesive etc.
- Installation of 1 no. of wash basin setup with tap
- Installation of a sink with tap

12. Storage tank

- Water tank of 10,000 Liters (Sintex) with bottom connection with the tank

13. Paint (Wall & Grill)

- All the brick walls and grill to be painted with PWD approved appropriate colour brand.

GENERAL INFORMATION ABOUT THE BIDDER

To be filled & signed by the authorized signatory of the firm

1.	a)	Name of Supplier/ Firm/ Company	
	b)	Name of contact person with details and mobile number	
2.	Full Address		
3.	E-mail address		
4.	Date of establishment of the firm		
5.	Status of the firm: (Proprietorship / partnership / company etc.) Attach photocopy of certificate		
6.	GSTN No. (Attach photocopy of certificate)		
7.	PAN Number (Attach photocopy of certificate)		
8.	Bank details		
9.	Previous work experience details (last 3 years)		

Certified that

1. I / we have read the terms and conditions governing this work and hereby agree to abide by them.
2. The agency (or any of its members) has neither been blacklisted by any central or state government organizations in the last five years or any litigation pending with any of these departments or Courts of Law.
3. The information provided by us as above regarding the details of firms is correct and nothing has been concealed. In case of any information is found to be incorrect at later stage, our bids may be summarily rejected.

Name and signature of the authorized
signatory with seal of the firm / company

ANNEXURE III**1. FINANCIAL BID**

NIQ Number: GBP/3.3.64/2024-25/ 17

Price quotes for: Biofloc setup (4 concrete tanks) _Shed Materials, Biofloc tanks and water supply**Name of Work:** Setting up of Biofloc unit under Business Incubation Centre for Fisheries and Aquaculture (BICFA) at Guwahati Biotech Park (GBP), Amingaon, Guwahati-781031

Sl. No.	Items	Quantity	Rate (INR)	Amount (INR)
1	Construction of a part of Biofloc unit (4 tanks) with shed house, water supply as per the scope of work and layout as mentioned in the NIQ	01 Job		
2	GST @			
TOTAL				

(Use separate sheet, if the space is not sufficient)

Name and signature of the authorized
signatory with seal of the firm / company

ANNEXURE IV

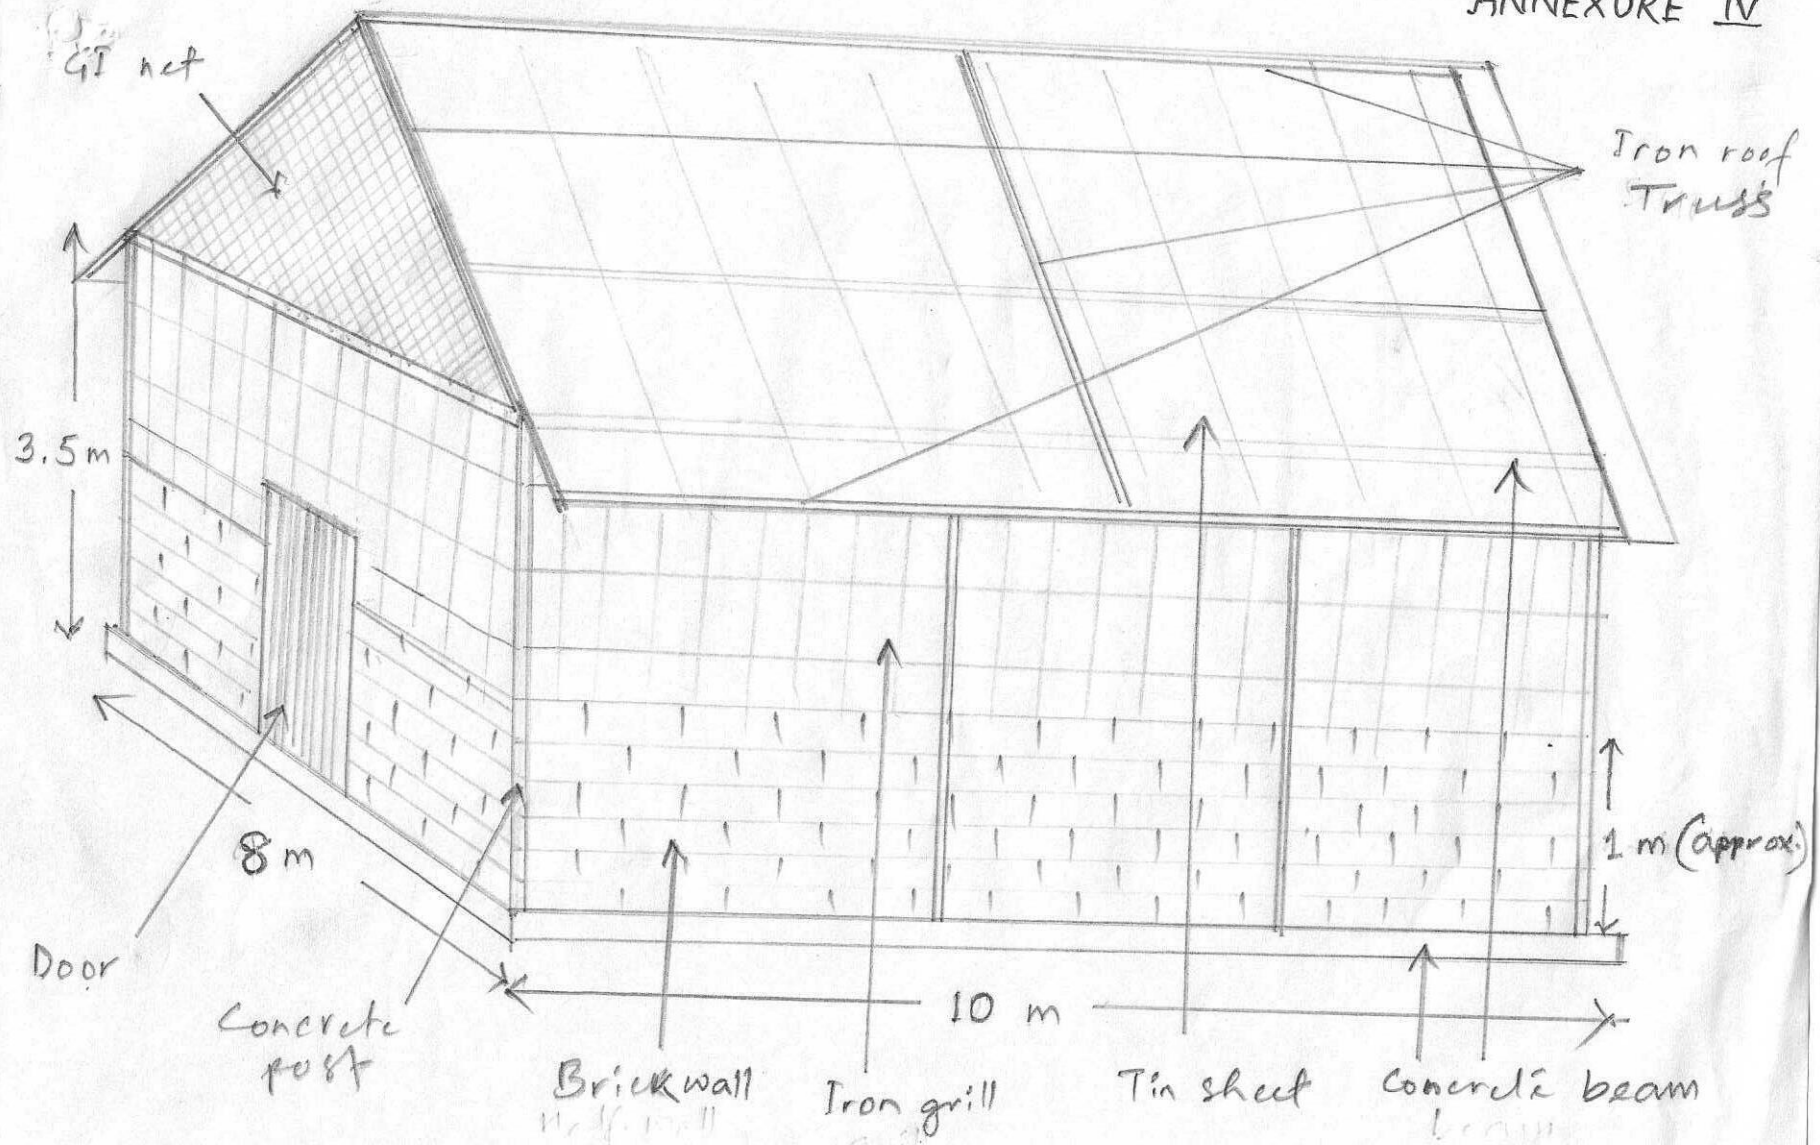


Fig: Layout of Shed house - Biofloc Unit (including 4 tanks inside)